


# 樹脂ネジ・ボルト (レニー)

材質：RENNY (ガラス繊維強化ポリアミドM×D6)  
 荷重たわみ温度：234℃ (1.82MPa)  
 連続使用温度：105℃  
 UL 規格：UL94HB  
 RoHS対応品

## RNB

十字穴付ナベコネジ




品番	L	M	D	K	P
RNB17-4	4				
RNB20-3	3				
RNB20-4	4				
RNB20-5	5				
RNB20-6	6	M2	3.5	1.3	0.4
RNB20-8	8				
RNB20-10	10				
RNB20-12	12				
RNB26-6	6				
RNB26-8	8				
RNB26-10	10	M2.6	4.5	1.7	0.45
RNB26-12	12				
RNB30-4	4				
RNB30-5	5				
RNB30-6	6				
RNB30-8	8				
RNB30-10	10				
RNB30-12	12	M3	5.5	2.0	0.5
RNB30-15	15				
RNB30-16	16				
RNB30-20	20				
RNB30-25	25				
RNB30-30	30				

品番	L	M	D	K	P
RNB40-5	5				
RNB40-6	6				
RNB40-8	8				
RNB40-10	10				
RNB40-12	12				
RNB40-15	15	M4	7.0	2.6	0.7
RNB40-16	16				
RNB40-20	20				
RNB40-25	25				
RNB40-30	30				
RNB50-8	8				
RNB50-10	10				
RNB50-12	12				
RNB50-15	15	M5	9.0	3.3	0.8
RNB50-20	20				
RNB50-25	25				
RNB50-30	30				
RNB50-35	35				

100ヶ (最低ロット)

## RSB

十字穴付サラコネジ




品番	L	M	D	K	P
RSB20-6	6	M2	4.0		0.4
RSB20-8	8				
RSB26-6	6	M2.6	5.2		0.45
RSB30-5	5				
RSB30-6	6				
RSB30-8	8				
RSB30-10	10	M3	6.0		0.5
RSB30-12	12				
RSB30-15	15				
RSB30-20	20				
RSB30-25	25				
RSB40-6	6				
RSB40-8	8				
RSB40-10	10	M4	8.0		0.7
RSB40-12	12				
RSB40-15	15				
RSB40-20	20				
RSB40-25	25				

品番	L	M	D	K	P
RSB50-10	10				
RSB50-12	12				
RSB50-15	15	M5	10		0.8
RSB50-20	20				
RSB50-25	25				

100ヶ (最低ロット)

## RBO

六角ボルト

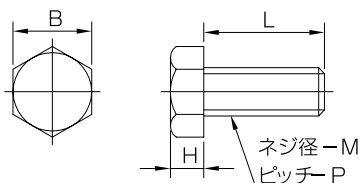


品番	L	M	D	K	P
RB050-10	10				
RB050-15	15				
RB050-20	20	M5	8.0	3.5	0.8
RB050-30	30				
RB050-35	35				

100ヶ (最低ロット)

## RCP

六角穴付ボルト (黒色)



品番	L	M	D	K	P
RCP30-6	6				
RCP30-8	8				
RCP30-10	10	M3	5.5	3.0	0.5
RCP30-12	12				
RCP30-15	15				
RCP30-20	20				
RCP40-6	6				
RCP40-8	8				
RCP40-10	10	M4	7.0	4.0	0.7
RCP40-12	12				
RCP40-15	15				
RCP40-20	20				

品番	L	M	D	K	P
RCP50-10	10				
RCP50-12	12				
RCP50-15	15	M5	8.5	5.0	0.8
RCP50-20	20				
RCP50-25	25				
RCP50-30	30				
RCP50-35	35				

100ヶ (最低ロット)

※M8×35～M10×40は白色