


樹脂ネジ・ボルト（ピーク）

材質：PEEK（ポリエーテルエーテルケトン）
 荷重たわみ温度：152℃（1.82MPa）
 連続使用温度：180℃
 UL規格：UL94V-0
 RoHS対応品

PENB

十字穴付ナベコネジ





品番	L	M	D	K	P
PENB17-4	4				
PENB20-4	4				
PENB20-5	5				
PENB20-6	6	M2	3.5	1.3	0.4
PENB20-8	8				
PENB20-10	10				
PENB20-12	12				
PENB26-6	6				
PENB26-8	8	M2.6	4.5	1.7	0.45
PENB26-10	10				
PENB26-12	12				
PENB30-4	4				
PENB30-5	5				
PENB30-6	6				
PENB30-8	8				
PENB30-10	10	M3	5.5	2.0	0.5
PENB30-12	12				
PENB30-15	15				
PENB30-16	16				
PENB30-20	20				
PENB30-25	25				

品番	L	M	D	K	P
PENB40-6	6				
PENB40-8	8				
PENB40-10	10				
PENB40-12	12				
PENB40-15	15	M4	7.0	2.6	0.7
PENB40-16	16				
PENB40-20	20				
PENB40-25	25				
PENB40-30	30				
PENB50-8	8				
PENB50-10	10				
PENB50-12	12				
PENB50-15	15	M5	9.0	3.3	0.8
PENB50-16	16				
PENB50-20	20				
PENB50-25	25				
PENB50-30	30				

10ヶ（最低ロット）

PESB

十字穴付サラコネジ

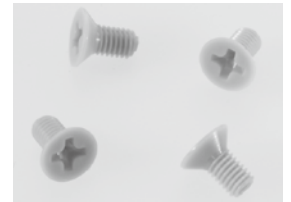


品番	L	M	D	K	P
PESB20-6	6	M2	4.0		0.4
PESB26-4	4	M2.6	5.2		0.45
PESB30-6	6				
PESB30-8	8				
PESB30-10	10				
PESB30-12	12	M3	6.0		0.5
PESB30-15	15				
PESB30-20	20				
PESB30-25	25				
PESB40-8	8				
PESB40-10	10				
PESB40-12	12				
PESB40-15	15	M4	8.0		0.7
PESB40-16	16				
PESB40-20	20				
PESB40-25	25				

品番	L	M	D	K	P
PESB50-10	10				
PESB50-12	12				
PESB50-15	15	M5	10		0.8
PESB50-20	20				
PESB50-25	25				

10ヶ（最低ロット）

PEBO

六角ボルト

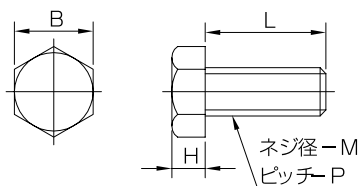


品番	L	M	D	K	P
PEB040-8	8				
PEB040-10	10				
PEB040-15	15	M5	8.0	3.5	0.8
PEB040-20	20				
PEB040-25	25				

品番	L	M	D	K	P
PEB050-10	10				
PEB050-15	15				
PEB050-20	20	M5	8.0	3.5	0.8
PEB050-25	25				
PEB050-30	30				

10ヶ（最低ロット）

PECP

六角穴付ボルト



品番	L	M	D	K	P
PECP30-6	6				
PECP30-8	8				
PECP30-10	10				
PECP30-12	12	M3	5.5	3.0	0.5
PECP30-15	15				
PECP30-20	20				
PECP40-6	6				
PECP40-8	8				
PECP40-10	10	M4	7.0	4.0	0.7
PECP40-12	12				
PECP40-15	15				
PECP40-20	20				

品番	L	M	D	K	P
PECP50-10	10				
PECP50-12	12				
PECP50-15	15	M5	8.5	5.0	0.8
PECP50-20	20				
PECP50-25	25				
PECP50-30	30				

10ヶ（最低ロット）

※M8×35～M10×40は白色