


樹脂ネジ・ボルト

PCNB



十字穴付ナベコネジ

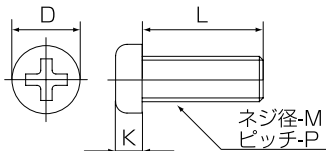

材質：PC（ポリカーボネート）
 荷重たわみ温度：135℃（1.82MPa）
 連続使用温度：115℃
 UL規格：UL94V-2


RoHS対応品

100ヶ（最低ロット）

品番	L	M	D	K	P
PCNB2-03	3	M2	3.5	1.3	0.4
PCNB2-04	4				
PCNB2-05	5				
PCNB2-06	6				
PCNB2-08	8				
PCNB2-10	10				
PCNB26-04	4	M2.6	4.5	1.7	0.45
PCNB26-05	5				
PCNB26-06	6				
PCNB26-08	8				
PCNB26-10	10				
PCNB26-12	12				
PCNB3-04	4	M3	5.5	2.0	0.5
PCNB3-05	5				
PCNB3-06	6				
PCNB3-08	8				
PCNB3-10	10				
PCNB3-12	12				
PCNB3-15	15				
PCNB3-16	16				
PCNB3-20	20				

品番	L	M	D	K	P
PCNB4-05	5	M4	7.0	2.6	0.7
PCNB4-06	6				
PCNB4-08	8				
PCNB4-10	10				
PCNB4-12	12				
PCNB4-15	15				
PCNB4-16	16	M5	9.0	3.3	0.8
PCNB4-18	18				
PCNB4-20	20				
PCNB4-25	25				
PCNB4-30	30				
PCNB5-06	6				
PCNB5-08	8				
PCNB5-10	10				
PCNB5-12	12				
PCNB5-15	15				
PCNB5-16	16				
PCNB5-18	18				
PCNB5-20	20				
PCNB5-25	25				

PCSB

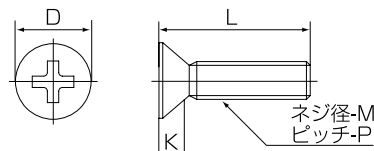

十字穴付サラコネジ



材質：PC（ポリカーボネート）
 荷重たわみ温度：135℃（1.82MPa）
 連続使用温度：115℃
 UL規格：UL94V-2


RoHS対応品

100ヶ（最低ロット）

品番	L	M	D	K	P
PCSB2-04	4	M2	4	1.2	0.4
PCSB2-05	5				
PCSB2-06	6				
PCSB2-08	8				
PCSB26-04	4	M2.6	5.2	1.5	0.45
PCSB26-05	5				
PCSB26-06	6				
PCSB26-08	8				
PCSB26-10	10				
PCSB26-12	12				
PCSB3-04	4	M3	6.0	1.75	0.5
PCSB3-05	5				
PCSB3-06	6				
PCSB3-08	8				
PCSB3-10	10				
PCSB3-12	12				
PCSB3-15	15				
PCSB3-16	16				
PCSB3-20	20				

品番	L	M	D	K	P
PCSB4-06	6	M4	8.0	2.3	0.7
PCSB4-08	8				
PCSB4-10	10				
PCSB4-12	12				
PCSB4-15	15	M5	10.0	2.8	0.8
PCSB4-16	16				
PCSB4-20	20				
PCSB4-25	25				
PCSB5-08	8				
PCSB5-10	10				
PCSB5-12	12				
PCSB5-15	15				

PCBO

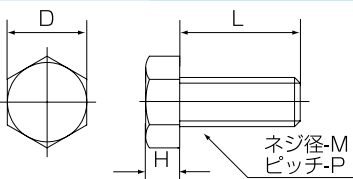

六角ボルト



材質：PC（ポリカーボネート）
 荷重たわみ温度：135℃（1.82MPa）
 連続使用温度：115℃
 UL規格：UL94V-2

RoHS対応品


※M8×35～M10×40は白色

100ヶ（最低ロット）


品番	L	M	B	H	P
PCBO5-10	10	M5	8	3.5	0.8
PCBO5-12	12				
PCBO5-15	15				
PCBO5-20	20				
PCBO5-25	25				
PCBO5-30	30				
PCBO6-10	10	M6	10	4	1
PCBO6-12	12				
PCBO6-15	15				
PCBO6-20	20				
PCBO6-25	25				
PCBO6-30	30				
PCBO6-35	35				

品番	L	M	B	H	P
PCBO8-10	10	M8	13	5.5	1.25
PCBO8-12	12				
PCBO8-15	15				
PCBO8-20	20				
PCBO8-25	25				
PCBO8-30	30				
PCBO8-35	35				
PCBO8-40	40	M10	17	7	1.5
PCBO10-20	20				
PCBO10-25	25				
PCBO10-30	30				
PCBO10-35	35				
PCBO10-40	40				

PPBO

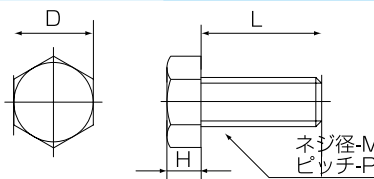

P.P.ボルト

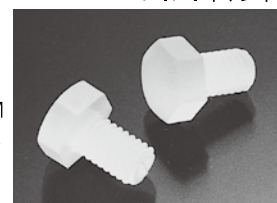

材質：PP（ポリプロピレン）
 荷重たわみ温度：120℃（1.82MPa）
 連続使用温度：115℃
 UL規格：UL94V-2

RoHS対応品

10ヶ（最低ロット）

品番	L	M	B	H	P
PPBO6-10	10	M6	10	4	1
PPBO6-15	15				
PPBO6-20	20				
PPBO6-25	25				
PPBO6-30	30				
PPBO8-12	12	M8	13	5.5	1.25
PPBO8-15	15				
PPBO8-20	20				
PPBO8-25	25				
PPBO8-30	30				