



樹脂イモネジ・穴付トメネジ・ローレットビス・ユリヤネジ

PCNG



イモネジ

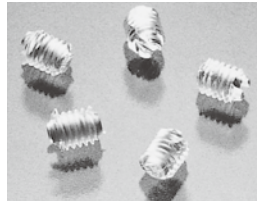

材質：PC (ポリカーボネート)
 荷重たわみ温度：135℃ (1.82MPa)
 連続使用温度：115℃
 UL 規格：UL94V-2


RoHS 対応品

品番	M	L
PCNG3-04	M3	4
PCNG4-06	M4	6
PCNG6-06	M6	6


100ヶ (最低ロット)

※M6は黒色

PCHG

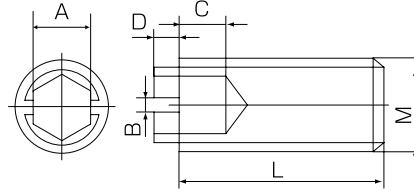

六角穴付トメネジ

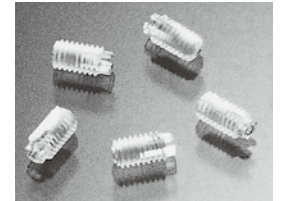

材質：PC (ポリカーボネート)
 荷重たわみ温度：135℃ (1.82MPa)
 連続使用温度：115℃
 UL 規格：UL94V-2



RoHS 対応品

100ヶ (最低ロット)

品番	L	M	A	B	C	D
PCHG3-05	5	M3	0.9	0.4	1.7	0.9
PCHG3-06	6					
PCHG3-08	8					
PCHG3-10	10					
PCHG4-04	4	M4	1.3	0.6	2.0	1.2
PCHG4-05	5					
PCHG4-08	8					
PCHG4-10	10					

PCRB

ローレットビス (白色)

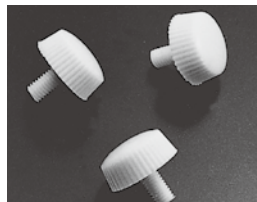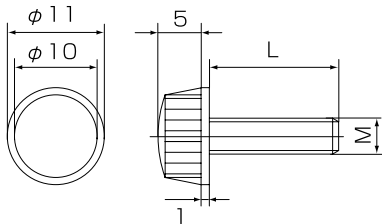

材質：PC (ポリカーボネート)
 荷重たわみ温度：135℃ (1.82MPa)
 連続使用温度：115℃
 UL 規格：UL94V-2

RoHS 対応品

品番	L	M
PCRB3-06	6	M3
PCRB3-08	8	
PCRB3-10	10	
PCRB3-12	12	
PCRB4-06	6	M4
PCRB4-08	8	
PCRB4-10	10	
PCRB4-12	12	



100ヶ (最低ロット)

※M6は黒色

PCKB

ユリヤネジ

※頭部は黒色もあります

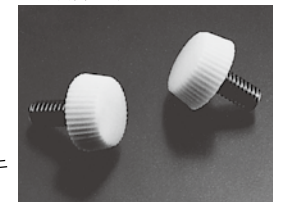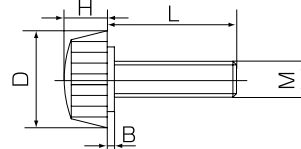

●頭部 材質：ユリア樹脂
 ●ネジ部材質：鉄
 処理：三価クロムクロメートメッキ
 RoHS 対応品

品番	L	M	D	H	B	品番	L	M	D	H	B
PCKB3-06	6	M3	11	5	0	PCKB5-07	7	M5	14	5.5	0.7
PCKB3-08	8					PCKB5-09	9				
PCKB3-10	10					PCKB5-12	12				
PCKB3-12	12					PCKB5-15	15				
PCKB3-14	14					PCKB5-17	17				
PCKB3-16	16					PCKB5-22	22				
PCKB3-20	20	PCKB5-27	27								
PCKB4-06	6	M4	11	5	0	PCKB5-07A	7	M6	17	7	1
PCKB4-08	8					PCKB6-10	10				
PCKB4-10	10					PCKB6-12	12				
PCKB4-12	12					PCKB6-16	16				
PCKB4-14	14					PCKB6-21	21				
PCKB4-16	16					PCKB6-26	26				
PCKB4-20	20										
PCKB4-06A	6										
PCKB4-08A	8										
PCKB4-10A	10										
PCKB4-12A	12										
PCKB4-14A	15										
PCKB4-16A	16										
PCKB4-20A	20										

100ヶ (最低ロット)